


SPECIFICATIONS

	GMC25E-C	G25E-C	G25E-C	25E-C	G05E-C	05E-C
CPU	Marvell® PXA320 806MHz					
OS	Microsoft® Windows® Embedded Handheld 6.5 English Version					
Memory	RAM	512MB				
	ROM	512MB				
Display	Display	9.4cm (3.7inches) Blauview® Color LCD with Touch Panel				
	Resolution	VGA (480 x 640 dots) 65,536 colors				
	Backlight	LED				
Indicator	Indicator 1: Battery charging status, Indicator 2: Operating status					
Printer	Printing Method	Thermal line dot				
	Paper Width	80 mm or 58 mm				
	Printing Width	72 mm or 48 mm				
	Speed	28 lines per second (while printing Kanji characters)				
	Paper	Roll paper, Label paper				
	Total number of Print Dots	576 (if printed on 80 mm width paper)				
	Character Size	Free double-width characters				
Font Type	ANK, Symbolics (UPC-E, NW-7, Code39, Code128), OCR-B, user-defined characters x 128					
Sensor	Positioning for printing					
C-MOS Imager	Type	Wide VGA (832x640) Monochrome Area Sensor				
	Aimer	Laser 650+10/-5nm, 1mW or less				
	Resolution	1D: 0.127mm, Stacked: 0.169mm, Matrix: 0.191mm				
	1D Symbologies	UPC-A/UPC-E/EAN8 (JAN8)/EAN13 (JAN13)/Codabar (NW-7)/Code39 Interleaved 2 of 5 (ITF)/MSI/Code93/Code128(GS1-128 (EAN128))/GS1 DataBar Omnidirectional (RSS-14)/GS1 DataBar Limited (RSS Limited)/GS1 DataBar Expanded (RSS Expanded)/Code32/GS1 DataBar Truncated (RSS-14 Truncated)/SBT				
Stacked Symbologies	PDF417/Micro PDF/Composite/Codablock F/GS1 DataBar Stacked Omnidirectional (RSS-14 Stacked)/GS1 DataBar Truncated (RS-14 Truncated)/GS1 DataBar Expanded Stacked (RSS Expanded Stacked)/GS1 DataBar Stacked (RSS-14 Stacked)					
Matrix Symbologies	Aztec, DataMatrix, Maxicode, QR Code, microQR					
NFC Reader/Writer	Frequency	13.56MHz				
	Contactless Smart Card	ISO14443 Type A (MIFARE®) / ISO14443 Type B / Felica®				
	RFID Tag	ISO15693 (I-CODE® SLI / Tag-it® / my-d®)				
Wireless Communication	Secure Access Module Slots	2 slots	3 slots	2 slots	3 slots	3 slots
	Bluetooth	Bluetooth® Specification Ver.2.0+EDR				
Digital Camera	Imaging Element	2.0 mega pixels C-MOS				
	Function	Auto focus, LED flash				
	Magnetic Card Reader	Standard ISO Tracks 1, 2 and 3				

		GMC25E-C	G25E-C	G25E-C	25E-C	G05E-C	05E-C
Input	Keyboard	Numeric (Alphabet) keys, Double zero key, - key, Decimal key, MENU key, Fn key, F1 to F4 keys, CLR key, BS key, ENT key, Cursor keys, Power key					
	Touch Panel	Plastic panel (resolution 480 x 640 dots) with character input pad					
Interface	Serial	USB (Host, Client) x 1					
	Card Slot	SDIO (SDHC supported) x 1					
	Audio	Microphone: Built-in (monaural), Speaker: Built-in (monaural)					
Power	Main Power	Lithium-ion battery pack (Operating period: Approx. 20 hours and more*) * When 120 keyboard inputs made every 10 minutes					
	Memory Backup	Lithium battery (rechargeable) on board					
Environment	Charge Time	Approx. 5 hours					
	Dust/Splash-proof	IP54 (compliant with IEC60529 standard)					
	Drop Durability	1.5m					
Dimensions/Weight	Operating Temperature	-20°C +50°C					
	Approx. External Dimensions	W	112mm*	112mm*	112mm*	112mm*	112mm*
		D	79mm**	79mm**	79mm**	79mm**	79mm**
	* Printer part ** Display part	H	286mm*	255mm*	255mm*	247mm*	247mm*
		Approx. Weight (including Battery Pack)	675g	630g	625g	600g	615g

IT-9000 Series System Configuration

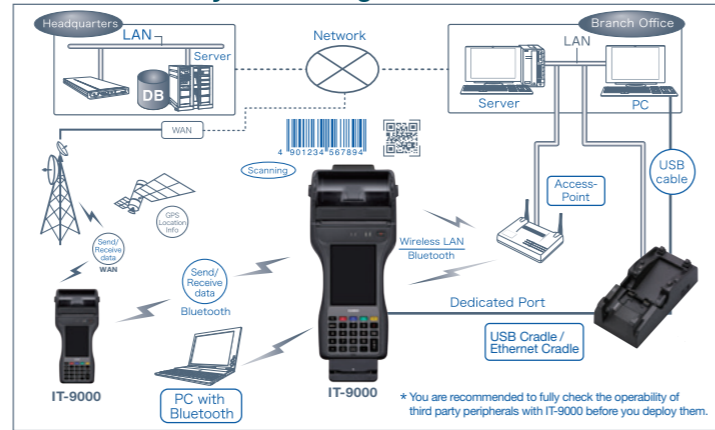

● CASIO is a registered trademark of CASIO Computer Co., Ltd. in Japan.
 ● Blauview is a trademark of CASIO Computer Co., Ltd., in Japan.
 ● Microsoft and Windows are registered trademarks of Microsoft Corporation in the USA and/or other countries.
 ● MIFARE, i-CODE are registered trademarks of NXP B.V.
 ● Felica is a trademark of Sony Corporation.
 ● Tag-it is a registered trademark of Texas Instruments Incorporated.
 ● My-d is a registered trademark of Infineon Technologies AG.
 ● The BLUETOOTH registered trademark is owned by Bluetooth SIG, Inc., U.S.A., and licensed to CASIO Computer Co., Ltd.
 ● Other company and product names are generally registered trademarks or trademarks of the respective companies.
 ● This catalogue is current as of March 2016.
 ● Specifications in the table above are current as of March 2016, and may be changed without prior notice.

CASIO COMPUTER CO., LTD.
Tokyo, Japan

High-speed printing and real-time communication
A multifunctional terminal that supports field operations



- Thermal printer enables issuance of tickets, receipts, and other documents on the spot
- Features GPS and HSDPA-capable 3G wireless WAN with high-speed data transfer up to 14.4Mbps downstream
- The 802.11b/g/n standard wireless LAN is useful for sending and receiving data in offices
- Equipped with an NFC reader/writer for contactless smart cards and ISO 15693 approved RFID tags
- The C-MOS Imager can read 1D and 2D symbologies with high speed and accuracy
- Fitted with a 2.0-megapixel digital camera with an auto focus function
- Includes a magnetic card reader for membership cards, credit cards and other cards



Functionality, reliability and usability in a single terminal. The IT-9000 handheld terminal

The IT-9000 delivers multi-functionality to perform a variety of work operations in a single device.

A rugged body suitable for even demanding outdoor use, equipped with a high-speed thermal printer, 3G wireless WAN, and C-MOS imager for barcode reading.

In addition, the IT-9000 has enhanced the security features to prevent information leaks.

The IT-9000 provides total support to increase the efficiency of on-site business operations such as meter reading and parking enforcement control.



ALL IN ONE

Integrated design that combines high operability and multi-functionality

High-Speed Thermal Printer


The IT-9000 has a built-in high-speed thermal printer that provides to print up to 28 lines per second* to dramatically boost work speed and efficiency. In addition, text size and fonts can be changed to suit the printer content.

* In the case of 1-ply roll paper, new batteries (fully charged), and room temperature operation



Wireless WAN & GPS for Outdoor Use*

The IT-9000 realises real-time communication with a built-in 3G wireless WAN module* for high-speed data transmission (HSDPA) and voice communication. In addition, GPS capabilities make it possible to acquire positional information. The IT-9000 is a highly flexible handheld printer terminal that supports wide-ranging applications in field operations. For instance, operators can record the completion of meter reading together with positioning information. * IT-9000-GMC25E-C/GC25E-C/G25E-C/G05E-C

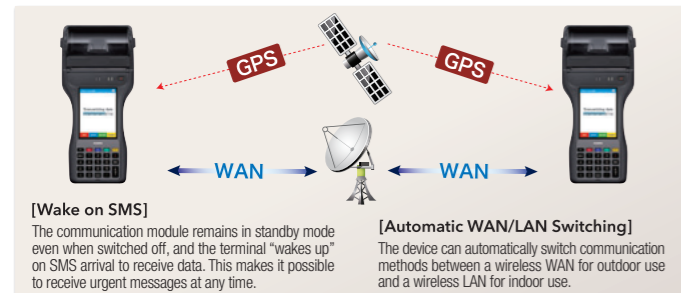

Built-In Magnetic Card Reader*

The IT-9000-GMC25E-C is equipped with a module for reading magnetic cards for membership cards, credit cards and other cards. The card reader improves efficiency in outside work by enabling workers to send server inquiries from the spot to obtain member information, employee ID information, and other data. * IT-9000-GMC25E-C

Built-in 2D Imager*

Some models are equipped with a C-MOS imager that can read 2D code symbologies. The imager also supports reading of GS1 DataBar, the newest barcode standard (barcodes and stacked codes). * IT-9000-GMC25E-C/GC25E-C/G25E-C/25E-C

Built-in NFC Reader/Writer with SAM Slots

The IT-9000 is equipped with a reader/writer that supports NFCIP2, the latest short-distance wireless communication standard, and supports recognition of contactless smart cards such as FeliCa® and MIFARE® and ISO15693-compliant RFID tags (13.56MHz). A built-in antenna at the top of the device enables seamless interaction with the target smart card. SAM (Secure Access Module) slots come as a standard feature for applications requiring a high level of security, such as prevention of unauthorised smart card use.



[Contactless Cards]



- Member management, loyalty point management, and attendance management using membership cards, employee IDs, and other cards.
- The IT-9000 offers enhanced security for outside work operators by performing user authentication on log-in.

[Use of RFID Tags]



- During meter reading the IT-9000 helps increase input efficiency and prevent errors by reading customer information from tags.
- Reading of registered vehicle information from tags makes possible use for applications such as managing traffic violations.

A Variety of Expansion Features

USB connector

The terminal is equipped with a USB connector that supports USB host/client. This expands the range of use of handheld terminals by enabling connection with external devices or cradleless connection with a PC.

SD card slot

The terminal comes with an SD card slot (SDHC-compatible) as a standard feature for use in applications such as operation with a high-capacity stored database for backup data or expansion of user memory.

Bluetooth® 2.0 integrated as a standard feature

Bluetooth® Ver. 2.0 (Class2) is integrated as a standard feature. This makes possible voice communication using wireless headsets.

OUTDOOR

Rugged specifications that support on-site operations

High-Resolution VGA LCD with Excellent Visibility for Outdoor User

The IT-9000 is equipped with a Blanview® LCD, a 3.7-inch colour transmissive TFT LCD with an easy-to-operate touch panel. The display provides excellent visibility indoors and in direct sunlight, and VGA-compatible high resolution (640 x 480 pixels) supports high-definition image display content. In addition, power consumption of the backlight is only about one-third that of semi-transmissive LCDs.



Keyboard Designed and Built for Comfortable Operation

The larger backlit keyboard ensures accurate key operation in a dark environment such as a warehouse. Since the keys are printed on the inside, the markings do not wear off. Numeric keys are used to input numbers and characters.



2.0 Megapixel Camera with Autofocus*

A 2.0 megapixel colour digital camera is integrated in some models of the IT-9000. With its powerful autofocus feature, this camera can capture high quality images for such tasks as identifying damaged goods, document capture and vehicle license number identification. The capturing of digital images can be incorporated seamlessly into the work-flow of the application without the need to use a separate camera or reconcile images and data records from two different devices. The IT-9000 offers excellent potential for solution enhancements and increased efficiency. * IT-9000-GMC25E-C/GC25E-C




Microsoft® Windows® Embedded Handheld 6.5

The IT-9000 series comes with Windows® Embedded Handheld Version 6.5 as the operating platform. Two editions are available: Professional for WWAN models and Classic for other models. This is the latest platform for mobile devices and PDAs and is ideally suited for use as a basis for an enterprise or business solution. Windows® Embedded Handheld 6.5 brings you the latest enhancements to the PDA user interface, allows efficient handling of various wireless technologies and opens up the possibility to run existing commercially available packages and software for the Windows Embedded Handheld family of devices.

Excellent Environmental Durability

Casio designed the IT-9000 to deliver the usability required for outdoor work. The rugged body offers improved impact resistance to withstand drops of 1.5 meters, ensuring the high durability necessary for use even under conditions of rough handling. The terminal is compliant with IP54* dust and water-splash proof standards and designed to ensure trouble-free operation in demanding environments such as heavy rain and sandy or dusty places. In addition, it is suitable for use in sub-zero temperatures or under the blazing sun (operating temperature range of -20°C to 50°C).

* Water splashed against the device from any direction has no harmful effects when all covers for connectors, etc. are closed.

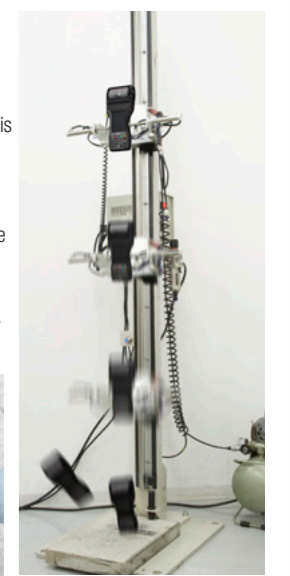

Human-Centered Design in the Uncompromising Pursuit of Usability

The IT-9000 reflects human-centered design processes applied in product development in the uncompromising pursuit of ease of use. It is surprisingly compact and light in weight for a fully featured multifunctional handheld terminal with built-in printer. The terminal was designed to be comfortable to hold it for long shifts without fatigue and to provide excellent operability in outdoor environments. The rounded form of the lower part of the device and the 79-mm grip length make the IT-9000 just the right shape and size for a secure grip. The centre of gravity is optimised to fit naturally in anyone's palm. The result is a device that places little strain on the hand even during long hour operation.

Human-Centered Design	Objective	Enhancement of total product quality that customers experience
	Method	Product development based on ISO13407 (human-centered design) process
The Pursuit of Usability	Concept	Human-Centered Design

SECURITY

Reliable security features to meet the needs of the times.

SSL Certification (SHA-2)

IT-9000-C models support SHA-2. SHA-2 is the collective name for SHA-224, SHA-256, SHA-384, and SHA-512.

IEEE802.11b/g/n Wireless LAN

The IT-9000 has an integrated IEEE802.11b/g/n wireless LAN module. It is WPA2-compliant to ensure secure wireless communication and also supports the TKIP and AES encryption methods and authentication using 802.1x (PSK, PEAP, EAP-TLS). These communication features provide a high level of security to support worry-free real-time operation.

Net Search Wireless LAN Tool

The IT-9000 is equipped with Net Search, a support tool useful in the construction of wireless environments. It displays the channel usage of each access point as well as SSID, signal strength, and other information necessary for the crowded 2.4GHz band. Net Search has excellent capabilities as a radio wave environment measurement tool.

